

GENSET

Standby Power	kVA	112
	kW	90
Prime Power	kVA	101,4
	kW	81
Soundproof canopy [mm]	W x L x H	1000x2880x1680
Open version [mm]	W x L x H	1000x2200x1385
Fuel tank [liter] -base	diesel	139
Net total weight with canopy*	kg	1 600
Net total weight open version*	kg	1 320
Noise [in canopy design]	dB(A)	71
Control panel		MGD 500L MK2


[info] Genset characteristics:

Phase currents (A), Phase voltages (V), Line voltages, Integrated frequency and speed display.

Cooling water temperature, operating hours counter, oil pressure indicator.

[info] AMF Genset control:

Standard voltage-free indications: genset running, high water temperature, low oil pressure, low battery voltage.

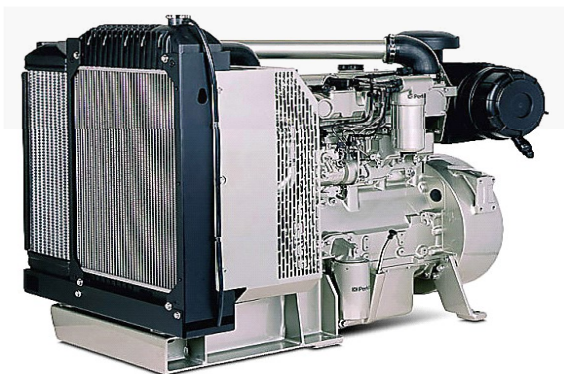

Manufacturer		MAAG
Number of Phase		3
Power factor		$\cos \varphi$ 0,8
Frequency [Hz]		50
Output voltage [VAC]		230 / 400 V
Protection		IP 23
Connection type		Star
Standby power	[kVA]	112
Insulation class		Class H

web: www.maaggenerator.com



[i]nfo Prime power:

Prime power. The maximum power accessible at the variable load for an unlimited number of hours per year in a variable load setting. It is not advisable that the variable load exceed 70% average of the prime power rating during any operational period. If the engine is run-ning at 100% prime power, yearly hours should not exceed 500. Overload situations should be avoided however a 10% overload capability is available for a 1 hour period within a 12 hour cycle of operation.

[i]nfo Standby power:

Standby Rating for a standby engine should be sized for a maximum of 70% average load factor and roughly 500 hours per year. Stand-by power ratings should never be applied except in true emergency outage situations. With standby rated generators there is no overload capability built into

Manufacturer		PERKINS
Model		1104C-44TAG2
Number of cylinders		4 in Line
Cycle		4
Aspiration		Turbocharger - intercooler
Cooling system		Water
Cooling circuit capacity	liter	12,6
Oil capacity	liter	8
Injection		direct
Speed/Frequency	rpm/Hz	1500/50
Fuel consumption	100%	22,6
	75%	17,1
	50%	11,2

[illegible][illegible]

*All of our products are made in Hungary in our own factory. Please kindly be notified that We reserve the right to make changes without the prior consent of the buyer except the standby and prime power which are always guaranteed. Thank you for understanding.
All pictures shown here are for illustration purpose only.*

MSZ EN ISO 14001:2015, MSZ EN ISO 9001:2015