

GENSET


Standby Power	kVA	22
	kW	18
Prime Power	kVA	20
	kW	16
Soundproof canopy [mm]	W x L x H	900x2100x1320
Open version [mm]	W x L x H	900x1600x1145
Fuel tank [liter] -base	diesel	82
Net total weight with canopy*	kg	650
Net total weight open version*	kg	470
Noise [in canopy design]	dB(A)	71
Control panel		MGD 500L MK2

[info] Genset characteristics:

Cooling water temperature, operating hours counter, oil pressure indicator.

[info] AMF Genset control:

Standard voltage-free indications: genset running, high water temperature, low oil pressure, low battery voltage.

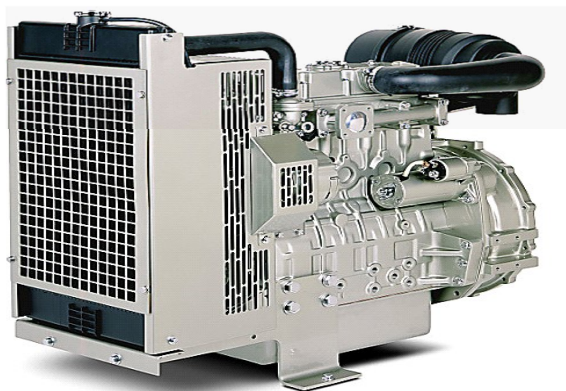

ALTERNATOR

Manufacturer		MAAG
Number of Phase		3
Power factor		$\cos \varphi$ 0,8
Frequency [Hz]		50
Output voltage [VAC]		230 / 400 V
Protection		IP 23
Connection type		Star
Standby power	[kVA]	23
Insulation class		Class H

OTHER INFO

web: www.maaggenerator.com



[i]nfo Prime power:

Prime power. The maximum power accessible at the variable load for an unlimited number of hours per year in a variable load setting. It is not advisable that the variable load exceed 70% average of the prime power rating during any operational period. If the engine is run-ning at 100% prime power, yearly hours should not exceed 500. Overload situations should be avoided however a 10% overload capability is available for a 1 hour period within a 12 hour cycle of operation.

[i]nfo Standby power:

Standby Rating for a standby engine should be sized for a maximum of 70% average load factor and roughly 500 hours per year. Stand-by power ratings should never be applied except in true emergency outage situations. With standby rated generators there is no overload capability built into

MOTOR

Manufacturer		PERKINS
Model		404A-22G1
Number of cylinders		4 in Line
Cycle		4
Aspiration		Natural
Cooling system		Water
Cooling circuit capacity	liter	7
Oil capacity	liter	10,6
Injection		Indirect
Speed/Frequency	rpm/Hz	1500/50
Fuel consumption	100%	5,3
	75%	4
	50%	2,9



*All of our products are made in Hungary in our own factory. Please kindly be notified that We reserve the right to make changes without the prior consent of the buyer except the standby and prime power which are always guaranteed. Thank you for understanding.
All pictures shown here are for illustration purpose only.*

MSZ EN ISO 14001:2015, MSZ EN ISO 9001:2015